


**DIN 935 / ISO 7035, 7036, 7036  
Kronenmuttern, hohe Form**

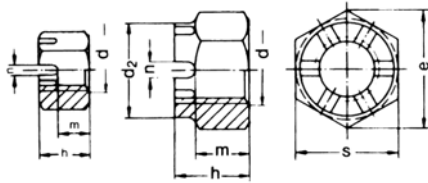

d mm	s	e min	m	h	n	d2 mm
M 8	13	14,38	6,5	9,5	2,5	-----
M 10	17	18,90	8	12	2,8	-----
M 12	19	21,10	10	15	3,5	17
M 14	22	24,49	11	16	3,5	19
M 16	24	26,75	13	19	4,5	22
M 18	27	30,14	15	21	4,5	25
M 20	30	33,53	16	22	4,5	28
M 22	32	35,72	18	26	5,5	30
M 24	36	39,98	19	27	5,5	34
M 27	41	45,63	22	30	5,5	38
M 30	46	51,28	24	33	7	42
M 33	50	55,80	26	35	7	46
M 36	55	61,31	29	38	7	50
M 39	60	66,96	31	40	7	55

**ISO: abweichende Schlüsselweiten**

**M 10 = 16 statt 17**

**M 12 = 18 statt 19**

**M 14 = 21 statt 22**

**M 22 = 34 statt 32**

---

alle Angaben ohne Gewähr – noch Fragen? [techdat@wegertseder.com](mailto:techdat@wegertseder.com)