

Wegertseder GmbH – Gewerbegebiet Dorfbach 5 – 94496 Ortenburg

Telefon: 08542/417400 – Telefax: 08542/417401 – Internet: www.wegertseder.com


Technische Abmessungen

Wir weisen ausdrücklich darauf hin, dass alle Angaben ohne Gewähr sind!

DIN 937

Kronenmutter niedrige Form

(austauschbar mit ISO 7038)

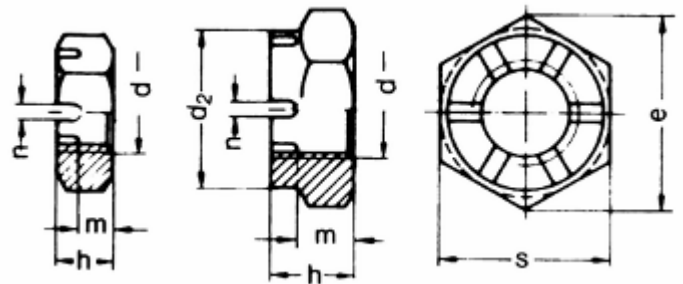

d mm	M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 22	M 24	M 26	M 27	M 28
d2 max.	-	-	-	17	19	22	25	28	30	34	38	38	38
h	6	8	9	10	11	12	13	13	15	15	30	17	30
n min.	2	2,5	2,8	3,5	3,5	4,5	4,5	4,5	5,5	5,5	5,5	5,5	5,5
s	10	13	17	19	22	24	27	30	32	36	41	41	41
m max.	3,5	4,5	5	6	7	7	8	8	9	9	22	11	22
Splint	1,6x14	2x16	2,5x20	3,2x22	3,2x25	4x28	4x32	4x36	5x36	5x40	5x50	5x45	5x50
d mm	M 30	M 32	M 33	M 35	M 38	M 39	M 40	M 42	M 45	M 48	M 50	M 52	
d2 max.	42	46	46	50	50	55	55	58	62	65	65	70	
h	18	20	20	20	20	22	22	23	25	25	27	27	
n min.	7	7	7	7	7	7	7	9	9	9	9	9	
s	46	50	50	55	55	60	60	65	70	75	75	80	
m max.	11	13	13	13	13	13	13	14	16	16	18	18	
Splint	6,3x50	6x60	6,3x56	6x65	6,3x63	6,3x71	6x70	8x71	8x80	8x80	8x80	8x90	